



1 GHz Spectrum Analyzer HM5014-2


HM5014-2

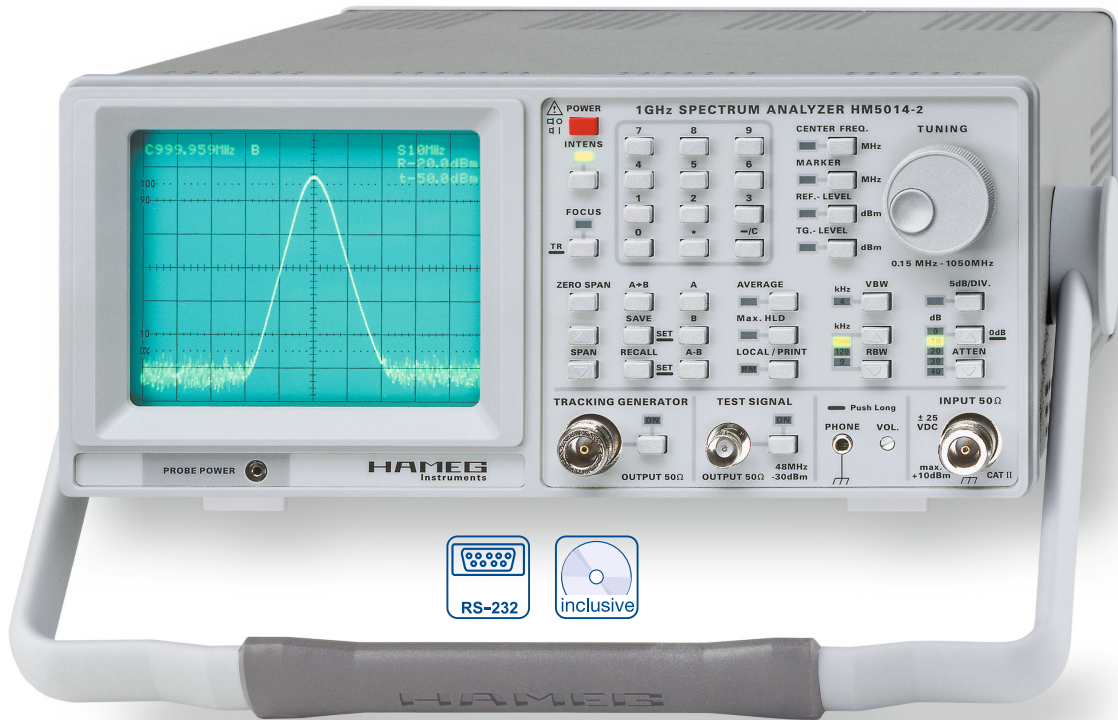


VSWR Test Unit HZ541



Amplifier frequency response measured using a tracking generator



Measurement of line-conducted interference



- Frequency range 150kHz...1GHz
- Amplitude measurement range -100dBm...+10dBm
- Phase Synchronous, Direct Digital frequency Synthesis (DDS)
- Resolution bandwidths (RBW): 9kHz, 120kHz and 1MHz
- Pre-compliance EMI measurements
- Software for documentation included
- Software for extended measurement functions for EMI measurements included
- Tracking Generator with output amplitude from -50dBm...+1dBm
- Serial interface for documentation and control

1 GHz Spectrum Analyzer HM5014-2

All data valid at 23 °C after 30 minute warm-up

Frequency Characteristics

Frequency Range :	0.15 MHz...1.050 GHz
Stability:	± 5 ppm
Aging:	± 1 ppm/year
Frequency Resolution:	1 kHz (6 ½ digit in readout)
Center Frequency Range:	0...1.050 GHz
LO Frequency Generation:	TCXO with DDS (Digital Frequency Synthesis)
Span Setting Range:	Zero Span and 1MHz...1000MHz (1-2-5 Sequence)
Marker:	
Frequency Resolution:	1 kHz, 6 ½ digit,
Amplitude Resolution:	0.4 dB, 3 ½ digit
Resolution Bandwidths (RBW) @ 6dB:	1 MHz, 120 kHz and 9 kHz
Video Bandwidth (VBW):	4 kHz
Sweep Time (automatic selection):	40 ms, 320 ms, 1 s*

Amplitude Characteristics (Marker Related) 150 kHz...1 GHz

Measurement Range:	-100 dBm...+10 dBm
Scaling:	10 dB/div., 5 dB/div.
Display Range:	80 dB (10 dB/div.), 40 dB (5 dB/div.)
Amplitude Frequency Response (at 10 dB Attn., Zero Span and RBW 1 MHz, Signal – 20 dBm):	± 3 dB
Display (CRT):	8 x 10 division
Amplitude Scale:	logarithmic
Display units:	dBm
Input Attenuator Range:	0...40 dB (10 dB-increments)
Tolerance of input attenuator:	± 2 dB relative to 10 dB position
Max. Input Level (continuous)	
40 dB attenuation:	+20 dBm (0,1 W)
0 dB attenuation:	+10 dBm
Max. DC Voltage:	± 25 V
Max. Reference Level:	+10 dBm
Reference Level Accuracy rel. to 500 MHz, 10 dB Attn., Zero Span and RBW 1 MHz:	± 1 dB
Min. Average Noise Level:	approx. -100 dBm (RBW 9 kHz)
Intermodulation Ratio (3 rd Order):	typical >75 dBc (2 Signals: 200 MHz, 203 MHz, -3 dB below Reference Level)
Harmonic Distortion Ratio (2 nd harm.):	typical > 75dBc (200MHz, Reference Level)
Bandwidth Dependent Amplitude Error rel. to RBW 1 MHz and Zero Span:	± 1 dB
Digitization Error:	±1 digit (0.4 dB) at 10 dB/div. scaling (Average, Zero Span)

Inputs/Outputs

Measuring Input:	N socket
Input Impedance:	50 Ω
VSWR: (Attn. ≥ 10 dB)	typ. 1.5:1
Tracking Generator Output:	N-socket
Output Impedance:	50 Ω
Test Signal Output:	BNC-socket
Frequency, Level:	48 MHz, -30 dBm (± 2 dB)
Supply Voltage for Probes (HZ 530):	6 V DC
Audio Output (phone):	3.5mm Ø jack
RS-232 Interface:	9pol./Sub-D

Functions

Keyboard Input:	Center Frequency, Reference Level, Tracking Generator Level
Rotary Encoder Input:	Center Frequency, Reference Level, Marker, Tracking Generator Level
Max. Hold Detection:	Peak Value Acquisition
Quasi-Peak Detection:*	Quasi-Peak Valuation
Average:	Mean Value Acquisition
Ref. Spectrum Memory:	2 k x 8 bit
SAVE/RECALL:	Save and Recall of 10 Instrument Settings
AM demodulation:	for audio
LOCAL:	RS-232 Remote Control OFF
Readout:	Display of various Measurement Parameters

Tracking Generator

Frequency Range:	0.15 MHz...1.050 GHz
Output Level:	-50 dBm...+1 dBm
Frequency Response (0.15 MHz...1 GHz)	
-10 dBm...+1 dBm:	± 3 dB
-50 dBm...-10,2 dBm:	± 4 dB
Digitization Error:	± 1 digit (0.4 dB)
Spurious Outputs	better than 20 dBc

General information

CRT:	D14-363GY, 8 x 10 div. with internal graticule
Acceleration Voltage:	approx. 2 kV
Trace Rotation:	adjustable on front panel
Power Supply:	105...253 V, 50/60 Hz ± 10 %, CAT II
Power Consumption:	approx. 35 W at 230V/50 Hz
Safety Class	Safety Class I (EN61010-1)
Operating temperature:	+5°C...+40°C
Storage temperature:	-20°C...+70°C
Rel. humidity:	5%...80% (non condensing)
Dimensions (W x H x D):	285 x 125 x 380 mm
Weight:	approx. 6.5 kg

*] in combination with software AS100E

Accessories supplied: Line Cord, Operators Manual, HZ21 Adapter Plug (N-plug with BNC socket) and Software for Windows on CD-ROM

Optional accessories:

HZ70 Opto-Interface (with optical fiber cable)
HZ520 Antenna
HZ530 Near Field Probe Set for EMI Diagnosis

www.hameg.com