

Fluke i30s AC/DC Current Clamp

Technical Data



The i30s current clamp is based on Hall effect technology for use in measurement of both dc and ac current. The i30s may be used in conjunction with oscilloscopes and other suitable recording instruments for accurate non-intrusive current measurement.

Electrical specifications

Specified current range: 30 mA to 30 A DC,
30 mA to 20 A AC rms
Usable current range: 5 mA to 30 A DC,
30 mA to 20 A AC rms
Crest factor: 1.4
Output sensitivity: 100 mV/A
Accuracy (at +25 °C): $\pm 1\%$ of reading ± 2 mA
Resolution: ± 1 mA
Load impedance: > 100 k Ω
Conductor position sensitivity: $\pm 1\%$ relative to
centre reading
Frequency range: DC to 100 kHz (-0.5 dB)
Phase shift below 1 kHz: < 2 degrees
Temperature coefficient: $\pm 0.01\%$ of reading/ $^{\circ}\text{C}$
Power supply: 9 V Alkaline, MN1604/PP3,
30 hours, low battery indicator
Working voltage (see Safety Standards section):
300 V ac rms or dc

General specifications

Maximum conductor size: 19 mm (.748 in) diameter
Output connection: Safety BNC connector,
supplied with safety 4 mm (.157 in) adapter
Output zero: Manual adjust via thumbwheel
Cable length: 2 m (6.56 ft)
Operating temperature range: 0 °C to +50 °C
(-32 °F to 122 °F)
Storage temperature range (with battery removed):
-20 °C to +85 °C (-4 °F to 185 °F)
Operating humidity: 15 % to 85 % (non-condensing)
Weight: 250 g (.55 lb)

Safety standards

BS EN 61010-1: 2001
 BS EN 61010-2-032: 2002
 BS EN 61010-031: 2002

300 Vrms, Category III, Pollution Degree 2


Use of the probe on uninsulated conductors is limited to 300 V acrms or dc and frequencies below 1 kHz.

EMC Standards

EN 61326: 1998 +A1, A2, & A3

Dimensions (HxWxD)

183 mm x 71 mm x 25 mm (7.2 in x 2.8 in x 1 in)

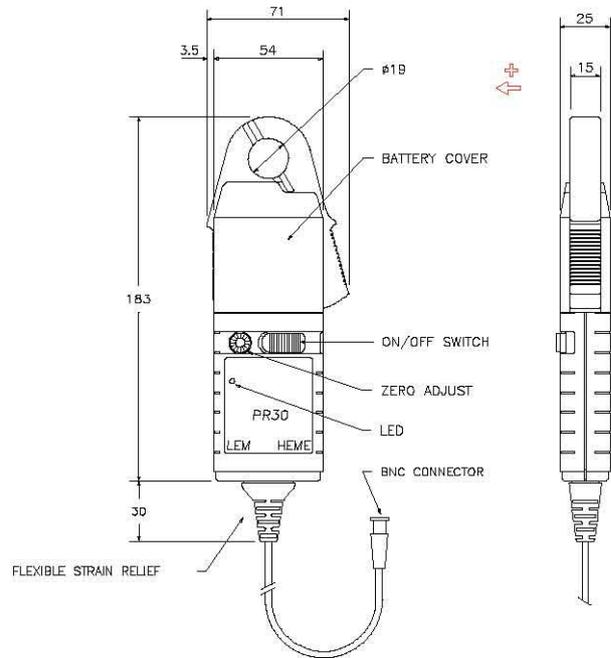

Ordering information

i30s AC/DC Current Clamp



i30s connected to a Fluke 199C ScopeMeter.

플루크 Shop 영호남 총판, 플루크 공식대리점

TOP (주) 탑스전자

대구광역시 북구 산격동 1665번지 전기재료관 마동 104호
 전국대표번호 : 1661-3799 | 팩스 : 053-604-3701
<http://www.topsi.co.kr> E-mail : tops@tops.co.kr